


EMC

SOLUTIONS
INCORPORATED

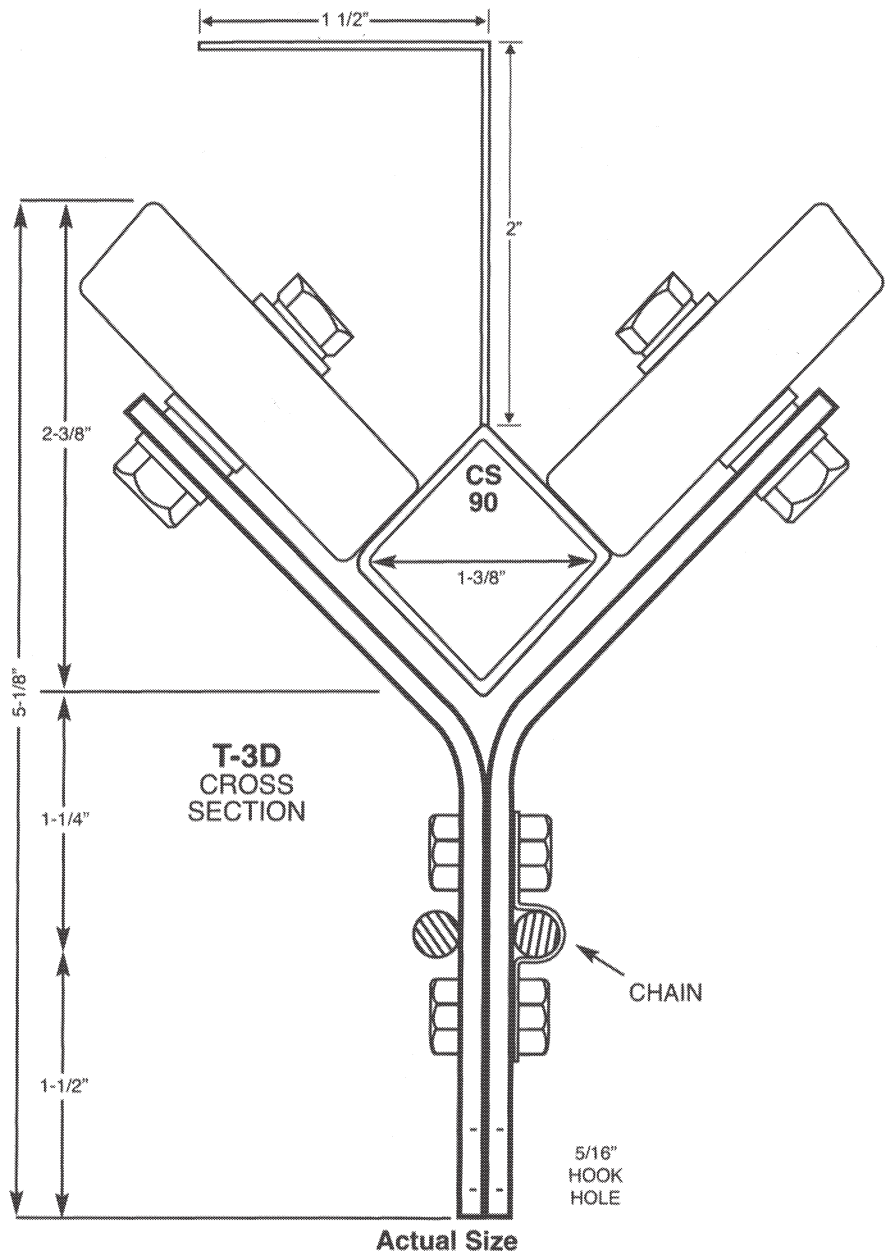


CHAIN


CS-300 EMC Solutions Drive Chain is durable steel, heat treated, bright zinc plated, of 1.400" pitch welded link type, ideally suited for multi-level conveyor systems. The working load limit of EMC Solutions chain is 670 lbs. Example: 500' or 5,000 lbs., live load capacity. Slip-on connecting "C" Links (CS-3 illustrated) are made of special alloy steel, and are used for connecting sections of chain to obtain precise overall chain length for the particular system. "C" Links are always mounted in trolley, no need to weld shut.



TROLLEY HANGERS & HOOKS

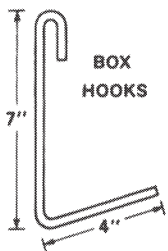


STANDARD BOX HOOKS
5B-6 - 6 Gauge (1/4")

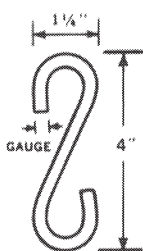

STANDARD
"S" HOOKS
4S-6 - 6 Gauge (1/4")




ST-203




ST-204
STAR AUTOMATIC



ST-103



ST-102 - 1-7/8" DIA. X 4-1/2"
ST-202 - 3-1/4" DIA. X 4"



H-50 TWO PIECE
BRACKET
For hanging loads,
hooking in direction of
conveyor movement.

INDEX HOOKS 360° SWIVEL 90° INCREMENTS 100# CAP.

360° SWIVEL
TURNING HOOK 100#